

DOOR CLOSER FOR WOODEN DOOR INSTALLATION INSTRUCTIONS


* For Double Action Door In 180° Opening Each Side With 90° Hold Open

* Max. Pushing Force 1.0kgs (2.2lbs)
Handicap friendly , Adjustable Closing Speed



* For Max. Door Width 900mm(36") ,
Weighting Up To 45kgs ,
Thickness 32~45mm(1-1/4"~1-3/4")

* Patented in many countries * For Indoor Use


Top Pivot




Cut-Out

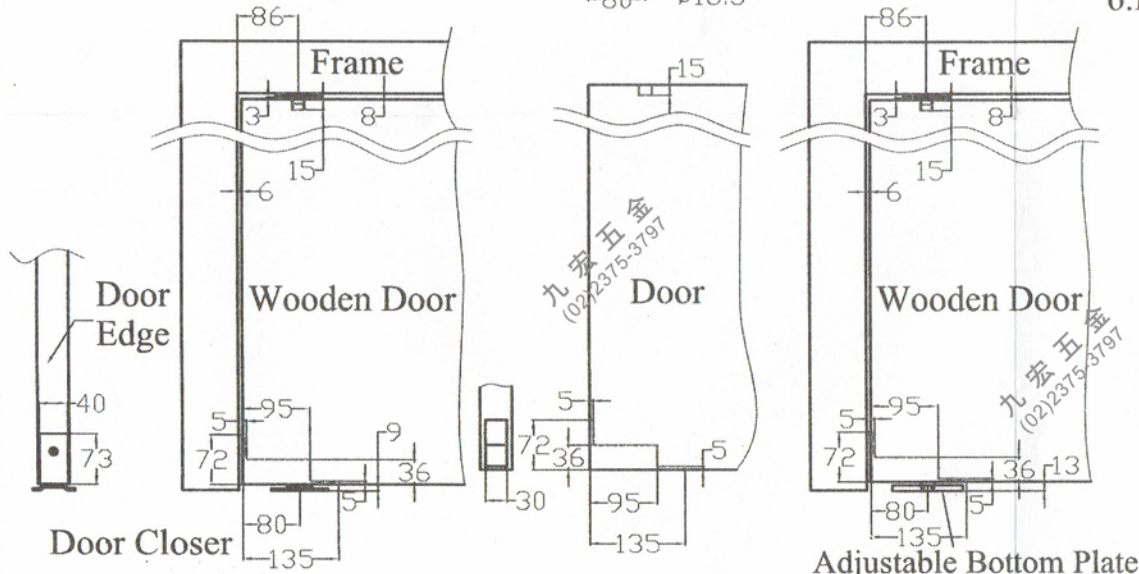

※ How to fix the closer ※

1. Loosen the Adjustment screw  on the back side of closer (*not to take out)


2. Turn the closer to 90 degree from base plate





3. Fix the closer and top pivot to the door

4. Fix the base plate and top plate after drilling holes

IMPORTANT :
PLEASE MUST INSTALL THE BASE PLATE
ACCORDING TO THE ARROW DIRECTION
ON STICKER OF BASE PLATE .




5. Tight and adjust the adjustment screw  only when the closer at 90 degree



6. Fix the end cap

* Fix s.s. end cap after you adjust the closing speed

* S.S. end cap is option

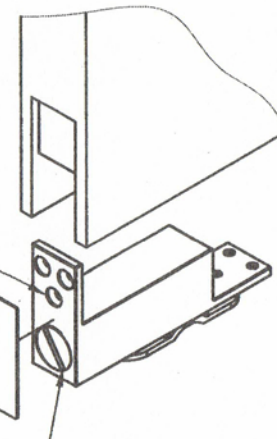

Adjustable Closing Speed